




## VERTICAL WASHING AND DRYING MACHINE

### DİK YIKAMA VE KURUTMA MAKİNESİ

# MVW

- ▲ It cleans wheat by washing with water. It is preferred in cases of very dirty grain and sufficient water availability. It is made of stainless sheet.
  - ▲ Washing and drying processes are carried out independent of each other by means of independently operating gearbox and drying motor.
  - ▲ The spirals provide the mixing of wheat with water and separate foreign particles like straw, dust, and stone from wheat.
  - ▲ Wheat transferred into the drying section is transferred out as dry after it is rubbed by pallets on the perforated sieve surface.
- 
- ▲ Buğdayın su ile yıkanarak temizlenmesini sağlar. Çok kirli tahıllarda ve su sorununun olmadığı yerlerde tercih edilir. Paslanmaz sac'tan imal edilmiştir.
  - ▲ Birbirinden bağımsız olarak çalışan redüktör ve kurutma motoru sayesinde yıkama ve kurutma işlemleri birbirinden bağımsız olarak yürütülür.
  - ▲ Helezonlar buğdayın su ile karışımını sağlayarak içerisinde bulunan saman, toz, taş gibi yabancı ayrılmasını sağlar.
  - ▲ Kurutma kısmına aktarılan buğday, paletler vasıtasıyla panjur elek yüzeyinde ovalanarak dışarıya kurutulmuş olarak aktarılır.

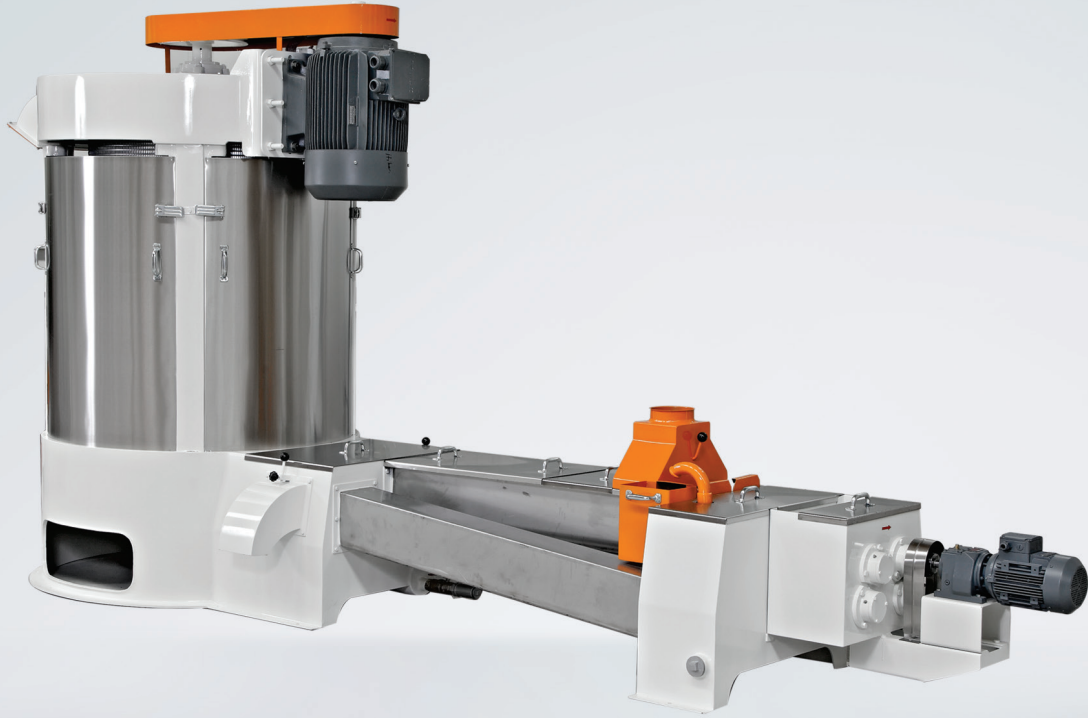

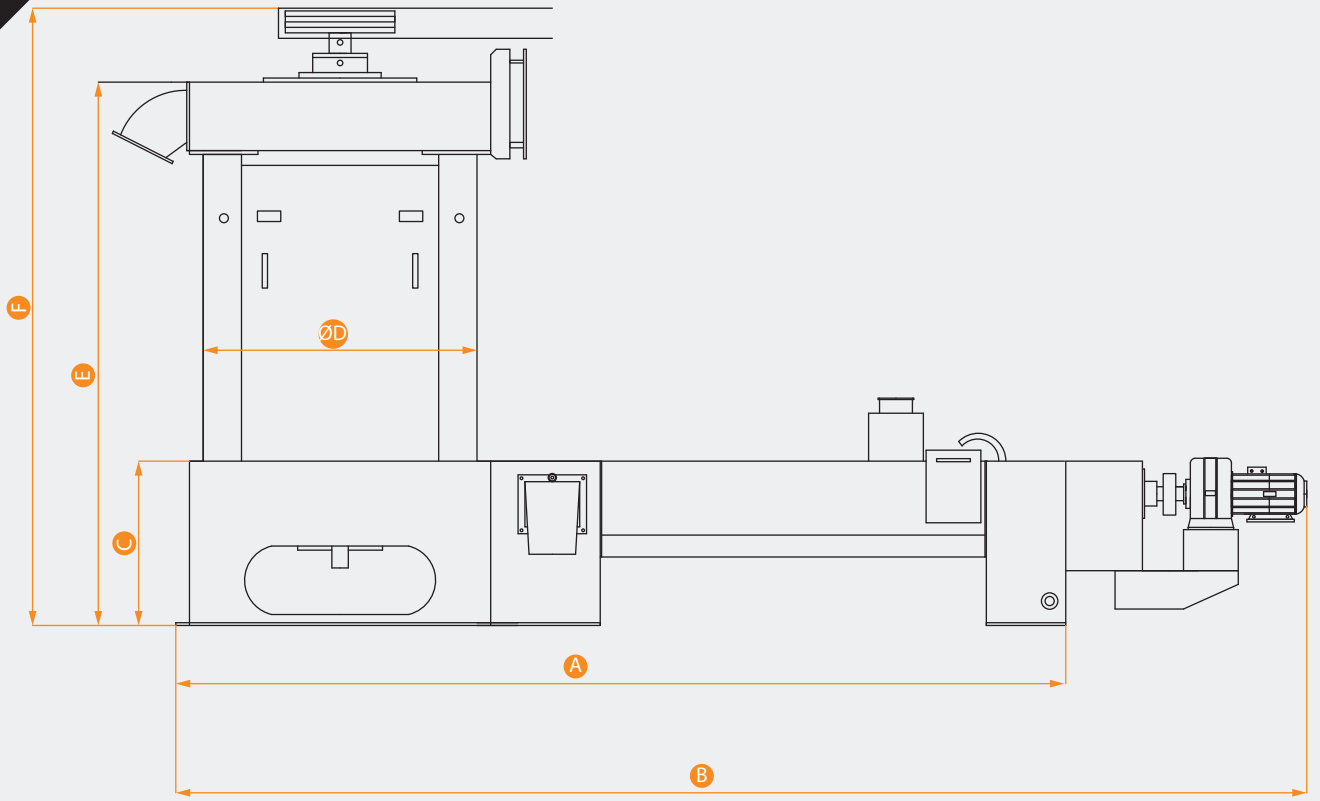

**DIMENSIONS | ÖLÇÜLER | Hfvpvths | DIMENSÕES (mm)**  
**TECHNICAL DATA | TEKNİK BİLGİLER | Ntlybxtcrbt Lfyyst | DADOS TÉCNICOS**

Type Model Vjltkm Modelo	Dimensions / Ölçüler Hfvpvths / Dimensões (mm)						Capacity Kapasite Ghjbpdjlbntkmyjcnm !n#x@ Capacidade (t/h)	Power / Güç (kW-rpm) / Vjnjh !rDn@ Potência (ex. KW)	
	A	B	C	ØD	E	F		Motor (kW) Vjnjh !rDn@ Potência ex. KW	Gear Box / Redüktör Vjnjh Htlernjh !rDn@ Caja de Engranaje Caixa de engrenagem
MVW 6	2770	3650	600	950	1985	2265	3-4	7,5	0,75
MVW 8	3250	4130		1100			6-7	11	1,1
MVW 12	3500	4380		1300			10-15	15	1,5